



Standard Ceiling - Acoustic (CS-19)

Frame : JayaBMS Hanger System (Bracket PN 220/221, Clip Adjuster PN 223/224, Rod PN 225/226) at 900mm max. centres
 JayaBMS Top Cross Rail PN 200/201/202 at 1200mm max. centres
 JayaBMS Furring PN 204/205 at 600mm max. centres

Board : 1 layer of Jayaboard Sheetrock 12mm and 1 layer of Jayabell 12mm

Weight : $\pm 18.5 \text{ Kg/m}^2$

Configuration:

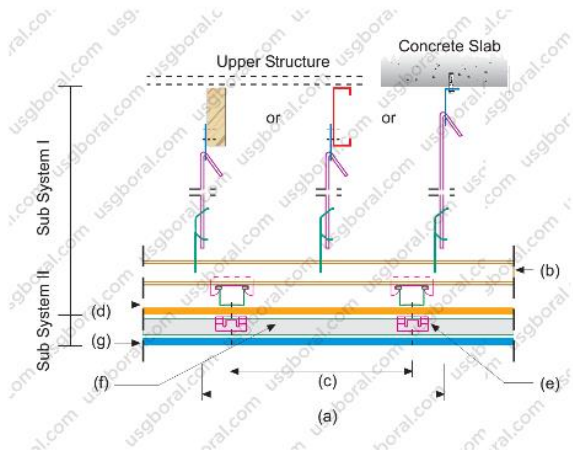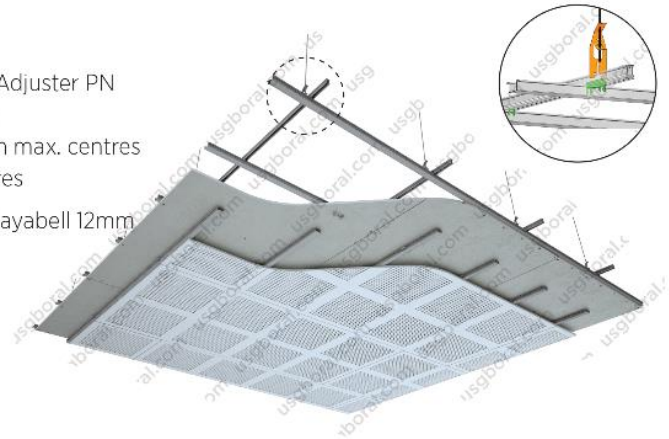

System	Material	Max frame space (mm)	
Sub System I	Suspension Clip PN 223/224	a	900
	Top Cross Rail PN 200/201/202	b	1200
	Furring Channel PN 204/205	c	600
	1 layer Jayaboard Sheetrock 12mm	d	-
Sub System II	Direct Fixed Clip PN 219	e	1200
	Furring Channel PN 204/205	f	600
	1 layer Jayabell 12mm	g	-

Note:
 All plasterboard joints shall be staggered between layers.
 Deflection limit $L/360$
 Performance values are for imperforate, jointed systems using only JayaBMS components and installed to the USG Boral Indonesia specification given.