

Translucents™ Canopies



TRANSLUCENTS Canopies

Features and Benefits

- Pre-formed curved panels.
- Twenty exciting décors for sophisticated options.
- Whimsical elegance for retail, office, health care or hospitality environments.
- Three easy-to-use elements; wave, vault or valley.
- Individual suspension or connected groupings for ribbons or larger spaces.
- Greater design flexibility in combination with TRANSLUCENTS™ Lay-In Panels.
- Sophisticated hardware for perfect fit and finish.
- Four simple connection/suspension points for fast, trouble-free installation.
- Preformed canopies—no additional hardware or field adjustments necessary.
- TRANSLUCENTS encapsulated panels have a minimum of 40% recycled content.
- Acrylic canopies have up to 50% recycled content.
- 100% recyclable material; may contribute toward LEED credits in MR 2.1, 2.2, 4.1 and 4.2.


Applications

- Gaming
- Hospitality
- Healthcare
- Retail
- General office



Call USG Boral for colour sample

Natural



Woven



Textiles




Embossed



Metallic



Color Gallery




New! See IC603 for 24 new colors.


Product Information			
Materials	Typical Sizes		System Weight
	Nominal	Actual (in plan)	
Wave	2'x6'	24"x68"	Approximately 9.7 kg/m ² .
Vault	2'x6'	24"x68"	Approximately 9.7 kg/m ² .
Valley	2'x6'	24"x68"	Approximately 9.7 kg/m ² .

Acoustics This product does not offer any acoustical properties.

Elements TRANSLUENTS™ Canopies can be suspended under the standard troffers normally located in a suspended ceiling or can be lit from above with point-source lighting such as halogen par lamps or newer LED technology.

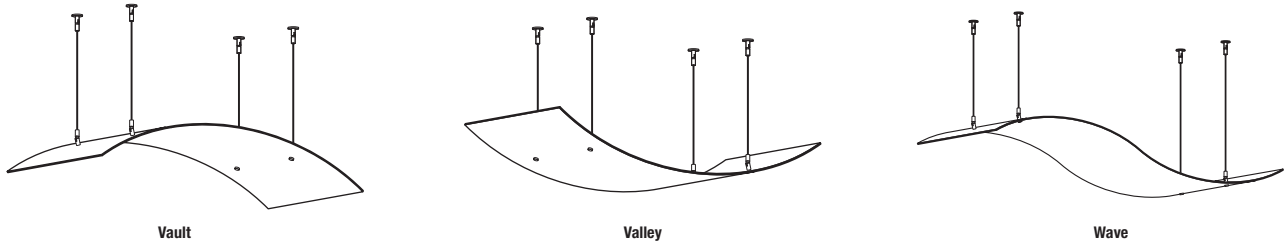

Perspective

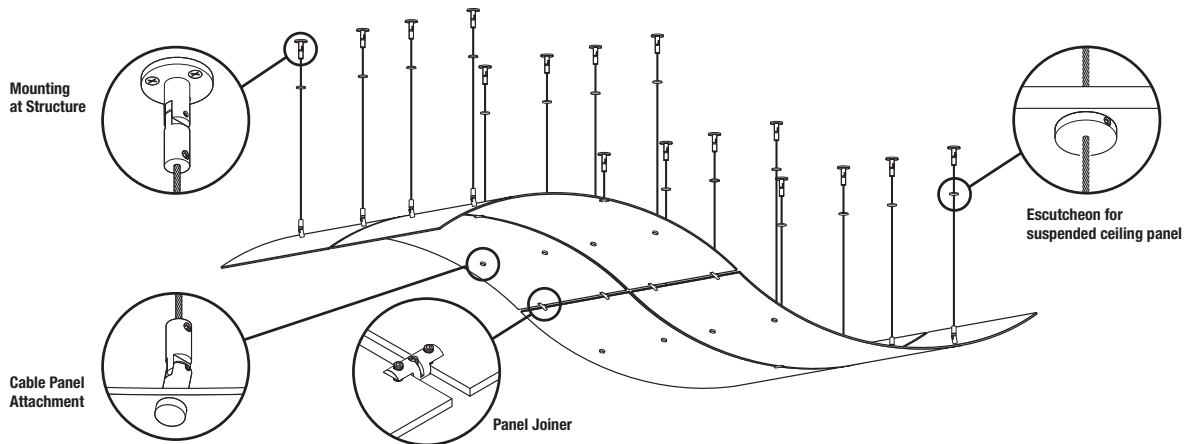

For More Information

Product literature
 Data sheet: IC596

Online tools
usgdesignstudio.com

This product is produced to order and will vary from batch-to-batch — panels ordered at the same time will be produced together and will be identical. USG cannot guarantee batch-to-batch consistency.

Code approval

TRANSLUENTS panels meet Class B requirements for flame spread and smoke developed as defined by ASTM 1264 and as tested in accordance with ASTM E84. (40/175) USG TRANSLUENTS panels also meet Class A requirements of NFPA and IBC (IBC) as interior finishes, not to be part of an air supply/return system. Designers and installers are advised to consult a fire protection engineer, NFPA 13 and their local codes for guidance where automatic fire detection and suppression systems are present.

Seismic applications

For installations on projects designated seismic design category C-F, suspension wires that are a minimum of no. 12 gauge galvanized, soft-annealed, mild steel wire shall be used. Please refer to SC2494 for more information about the seismic guidelines for specialty and decorative ceilings. Because codes continue to evolve, check with a local official prior to designing and installing a ceiling system. Other restrictions and exemptions may apply.

Weight

Approximately 9.7 kg/m².

Recycled content

100% recyclable.
 Woven, Textiles, Shimmer, Natural, min. 40% recycled content, 100% recyclable.
 Embossed panels: 50% recycled content, 100% recyclable. Color Gallery: Up to 40% recycled content.