



GRIDWARE Suspension System (GWDWX) with 2' x 2' Cells in Custom Color/
8" COMPASSO Perimeter Trim in Matching Color

LEED Credits

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials ¹	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●				

Features and Benefits

- Open-cell suspension system painted 360°.
- Main tees punched with only the necessary cross tee holes for a clean look.
- Available in three standard grid profiles: 9/16", 15/16", and 1-1/2".
- Simple system readily accommodates standard 2' x 4' and 2' x 2' lay-in light fixtures and air diffusers.
- Custom colors available.

Applications

- Accent areas
- Hospitality
- Retail spaces

Call 888.874.2450 for color samples

Painted Metals



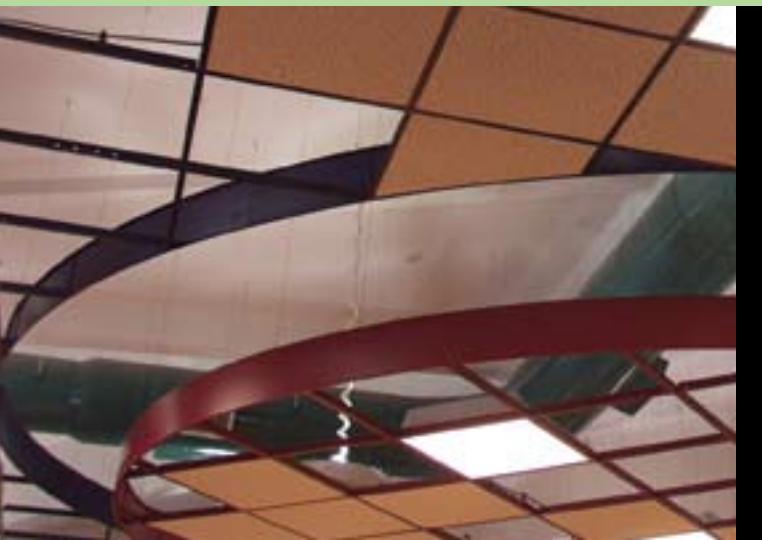
Flat White













Silver Satin
002



Flat Black



	Product Information			
	Materials	Typical Sizes	Finishes	
	Double-web, hot-dipped galvanized steel body and steel cap with chromated cross-tee clip.	2' x 2' module; 2' x 2', 2' x 4' and 4' x 4' cells	<ul style="list-style-type: none"> - GWDX stocked in Flat Black, Flat White, and Silver Satin pre-painted, baked polyester paint finishes with exposed chromate cross tee clips; touch-up paint is available to field-paint cross tee clips to match the finish. Spray-painted, baked polyester finish with 100% tee coverage available as a special order. - GWDXW and GWDXT available as a special order only; finish is spray-painted, baked polyester with 100% tee coverage. 	
Face Options	GWDX	GWDXW	GWDXT	GWM9 – Wall Angle
				
Design Options	2' x 2' Openings		2' x 4' Openings	4' x 4' Openings
				
GRIDWARE Components	24" Cross Tee			
				
	48" Cross Tee			
				
	12' Main Tee			
				
	<p>Exposed Hanger Solutions For ceiling islands and other installations with exposed hanger wires, USG offers stainless steel wire and rope wire with a variety of connectors for an attractive alternative to standard 12-gauge wire. See installation guide IC453 for more information.</p>			

For More Information

Product literature
System brochure: IC35104
Data sheet: IC312

Online tools
usgdesignstudio.com

Recycled content
GridWARE suspension:
25% recycled content.

Footnotes
1. Dependent on location; contact your USG representative.

