

Firestop

Fire Resistant, Industry Leader



BORAL Firestop

BORAL Firestop is ideal for lining walls, ceilings, beams, and columns in residential and commercial construction. BORAL Firestop is specially developed and tested for use in fire rated applications. The application of BORAL Firestop in single and multiple layers provides a variety of fire rated and acoustical performances.




Thickness	Metric (mm)	12.5mm, 16mm
Edge Details:	Recessed Edge	Yes
	Square Edge	Yes
Width (mm):	1220	
Length (mm):	2440, 2743, 3048	
Weight:	12.5mm = 10.50kg/m², 16mm = 13.00kg/m²	
Product Testing:	BS 1230 part 1, ASTM C473	


The above lengths are standard sizes, Boral Plasterboard is able to produce any required sheet length depending upon the order size.

How to specify this product:

Supply and install BORAL Firestop 12.5mm/16mm as shown on the relevant drawings. BORAL Firestop must be installed and finished in accordance to manufacturer's specification.

For more information, please contact our technical service.

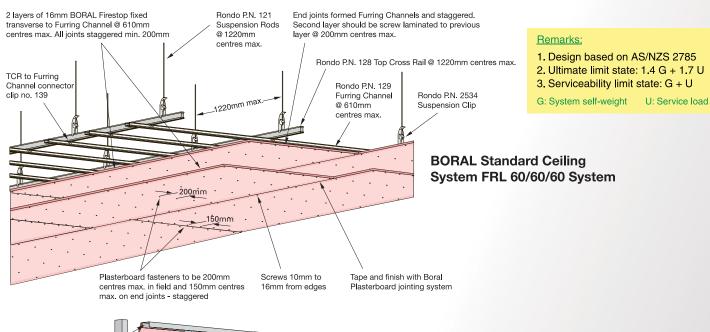

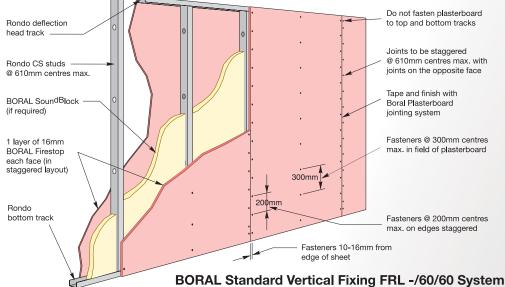

Note: Not recommended for external use.



Boral Plasterboard (Malaysia) Sdn Bhd

Head Office:

Lot 606, Off Jalan SS13/IK 47500 Subang Jaya Selangor Darul Ehsan Malaysia

t (603) 5629 2000

f (603) 5629 2008

www.usgboral.com

Guarantee

Boral Plasterboard warrants goods manufactured and supplied by it to be of consistent quality and free from any defects. This warranty shall only apply when goods have been installed with the components and accessories as specified and in accordance with the detailed instructions set out in the Boral Plasterboard Technical Literature.



