

IMPRESSIONS™ CLIMAPLUS™ HIGH-NRC



Impressions High-NRC Panels with ClimaPlus Performance /
DONN Centricitee DXT Suspension System

FEATURES AND BENEFITS

- Micro fissured non-directional pattern for a cleaner, whiter appearance
- ClimaPlus 30-year lifetime system warranty to withstand temperature and humidity conditions up to 49°C (120°F)/99% relative humidity without visible sag when used with a USG DONN® Brand suspension system.

APPLICATIONS


- Offices
- Retail
- Warehouse
- Schools
- Showrooms
- Restaurants

SUBSTRATE

- Water-felted mineral-fiber

 High Recycled Content

Medium-textured panel

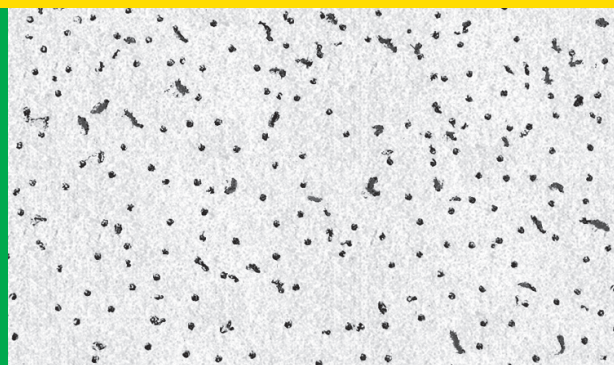

IMPRESSIONS™ CLIMAPLUS™ HIGH-NRC

USGBORAL.COM

IMPRESSIONS CLIMAPLUS HIGH-NRC PANELS

Edge	Panel Size ³	Class	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹
SQ 	2' x 2' x 3/4" 600 x 600 x 19mm	Class A	973 ME973	.70	33	.86	White	A, B, C	Low		57%
	2' x 4' x 3/4" 600 x 1200 x 19mm	Class A	974 ME974	.70	35	.86	White	A	Low		57%
SLT 	2' x 2' x 3/4" 600 x 600 x 19mm	Class A	975 ME975	.70	33	.86	White	D	Low		57%
	2' x 4' x 3/4" 600 x 1200 x 19mm	Class A	978 ME978	.70	35	.86	White	D	Low		57%
FLB 	2' x 2' x 3/4" 600 x 600 x 19mm	Class A	976 ME976	.70	33	.86	White	E, F, G, H	Low		57%
	2' x 4' x 3/4" 600 x 1200 x 19mm	Class A	971 ME971	.70	35	.86	White	E, F, G, H	Low		57%

LEGEND

Low Emission (VOC Class)

Meets the emission test criteria as low-emitting prescribed by the Singapore Green Building Council (SGBC) following ASTM D5116-06 testing methods.

ClimaPlus Superior Performance

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines

≥ .70 NRC

≥ .85 LR

GRID PROFILE OPTIONS

A DX® DXI DXII DXIII	B Centricitee™ DXT™	C Omega™ DXM™	D DX® DXI DXII DXIII	E Omega™ DXM™	F Fineline® 1/8" DXFF™	G Fineline® 1/8" DXF™	H Centricitee™ DXT™

PHYSICAL DATA/ FOOTNOTES

ASTM E1264 Classification
Type III, Form 2, Pattern C, D, E

ASTM E84 surface burning characteristics
Class A
Flame spread: 25
Smoke developed: 50

Imperial Weight
1.16-1.30 lb./ft.²
Metric Weight
5.70-6.10 kg/m²

Thermal Resistance
R-1.7

Backloading
Refer to Installation and Maintenance

Footnotes

- For details, see LEED report tool at usgdesignstudio.com.
- LR values are shown as averages.
- Not all panel sizes available in all geographic areas, some metric sizes available to order
- Custom color available.

Short Specification:

- Ceiling system shall comprise USG Impressions ClimaPlus™ High-NRC high humidity / fire resistant acoustical ceiling panels in (DONN Centricitee 15mm [9/16"] / DONN DX 24mm [15/16"] / DONN Omega 15mm [9/16"] / DONN Fineline 15mm [9/16"] / DONN Identitee 15mm [9/15"]) exposed grid including wall trim as manufactured by USG Interiors, LLC.
- Panels shall have NRC 0.70.
- Panels shall have CAC 33-35.
- Nominal size (600mm x 600mm / 600mm x 1200mm) x 19mm / (2' x 2' / 2' x 4') x 3/4".
- Edge detail shall be (Fineline Bevel [FLB] / Shadowline Tapered [SLT] / Square [SQ]).
- Limiting Conditions - Maximum 49°C (120°F)/99% RH.

TRADEMARKS

The trademarks CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXM, DXI, OMEGA, DXT, FINELINE, IDENTITEE, IMPRESSIONS and INNOVATION INSPIRED BY YOU are trademarks of USG Boral Building Products or one of more of its affiliates.

SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

ACT 10 2015 / 7-15
© 2015 USG Boral. All rights reserved.

Manufactured, sold or distributed by USG Boral Building Products or one or more of its affiliates.
Persiaran Lagoon, Bandar Sunway,
Petaling Jaya, Selangor, Malaysia 46150

USG BORAL SINGAPORE
8 Boon Lay Way #02-06 TradeHub 21
Singapore 609964
Tel: (65) 6272 9272 Fax: (65) 6278 5310



www.usgboral.com

USG BORAL