

GEOMETRIX™



GEOMETRIX 3" Flat Panels and 3" Wedge Panels / DONN CENTRICITEE DXT Suspension System

FEATURES AND BENEFITS

- Multiple profiles and depths lend new dimension to ceiling and wall design
- Panel depths ranging from 1-1/4" to 3" allow a spectrum of possibilities, from subtle textures to bold rhythms
- 2'x2' lay-in panels are compatible with 9/16" and 15/16" DONN® Brand suspension systems.
- Solid or perforated panels
- Available in Flat White, Silver Satin and custom colors for design versatility

APPLICATIONS

- All commercial applications

 High Recycled Content

LEED CREDITS

Recycled Content: Up to 90%

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
•	•	•				•



Painted Metals (HRC Finishes)



Flat White



Silver Satin 002

PRODUCT INFORMATION


Materials	Size and Weight	Finishes
Panels: Aluminum ³	Panels: 2'x2'; Panel weight (for 3" deep flat panel) : 0.75 lbs./sf.	Panels are available in smooth metal or in a choice of five perforated patterns (C375, D250, D375, C062 and C062A). A black Acoustibond backer is included on all perforated panels unless otherwise specified. Acoustibond backer is also available in white.

ACOUSTICS


Description	Optional Acoustical Material	Sound Rating – NRC	
		Perforation A062	Perforation A116
Perforated panel	Acoustibond™ backer	.65	.70
Perforated panel	1-1/2", 6 lb. density fiberglass (by others)	.90	.95
Perforated panel	2", .75 lb. fiberberglass in poly bag (by others)	.85	.90

PANELS CONFIGURATIONS

Flat ^{4,5}	Wedge ⁴	Inside Wedge Corner	Outside Wedge Corner
---------------------	--------------------	---------------------	----------------------

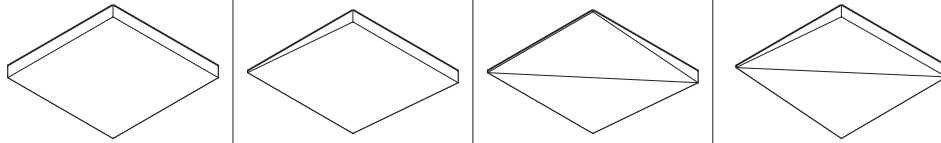


DEPTHS

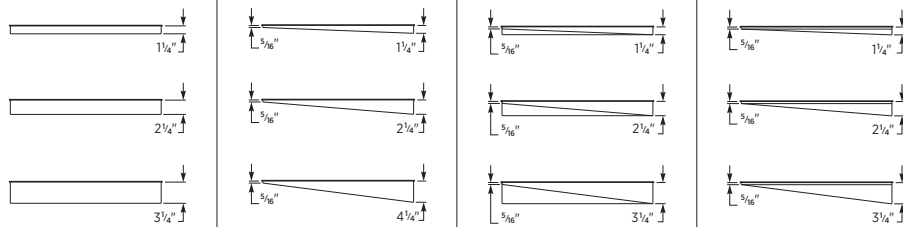

EDGE DETAILS

Geometrix Panels with 15/16" DXL™ Suspension	Geometrix Panels with 9/16" Centricitee™ DXT Suspension	Geometrix Panels with 9/16" Fineline™ DXF Suspension	Geometrix Panels with 9/16" Fineline™ 1/8 DXFF Suspension

ASSEMBLY

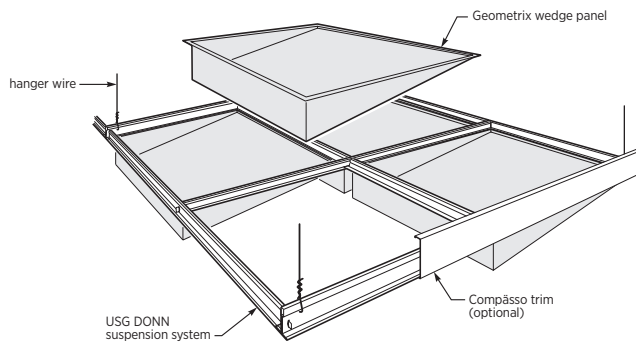

High Recycled Content¹

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Online tools

usgdesignstudio.com
usg.com/resources/onlinetools/topogeo/index.jsp

Recycled content

Geometrix aluminium panels: up to 90% recycled content

Footnotes

1. For details, see LEED report tool at usgdesignstudio.com.
2. Requires perforation and Acoustibond backer.
3. Geometrix panels meet ASTM E84 class A requirements for surface burning characteristics.
4. Available pre-engineered utility circles accommodate lighting and utilities.
5. Also available with 5/16" depth.

TRADEMARKS

The trademarks ACOUSTIBAND, CENTRICITEE, COMPASSO, DONN, DX, DXF, DXFF, DXL, DXT FINELINE, GEOMETRIX and INNOVATION INSPIRED BY YOU are trademarks of USG Boral Building Products or one of more of its affiliates.

SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

ACT 33 2015 / 7-15

© 2015 USG Boral. All rights reserved.

Manufactured, sold or distributed by USG Boral Building Products or one of more of its affiliates.
Persiaran Lagoon, Bandar Sunway, Petaling Jaya, Selangor, Malaysia 46150

USG BORAL SINGAPORE

8 Boon Lay Way #02-06 TradeHub 21
Singapore 609964
Tel: (65) 6272 9272 Fax: (65) 6278 5310

www.usgboral.com

